




MianKang Bearing Co., Ltd.

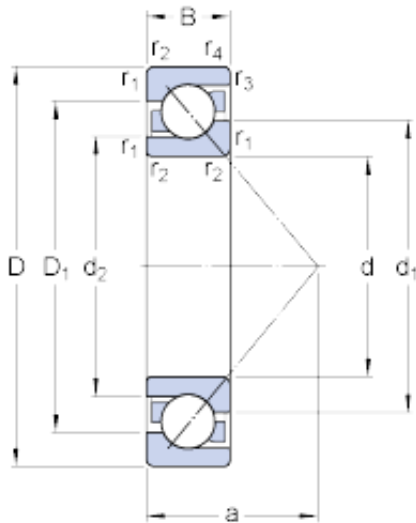

7309 becbp Bearing 2D drawings and 3D CAD models

skf 7309 becbp bearing

Bearing No. 7309 becbp

Size	100x45x25 mm
Bore Diameter	100 mm
Outer Diameter	45 mm
Width	25 mm
d	45 mm
D	100 mm
B	25 mm
d ₁	66.5 mm
d ₂	55.25 mm
D ₁	79.9 mm
a	43 mm
r _{1,2} - min.	1.5 mm
r _{3,4} - min.	1 mm
d _a - min.	54 mm
D _a - max.	91 mm
D _b - max.	94.4 mm
r _a - max.	1.5 mm
r _b - max.	1 mm
Basic dynamic load rating - C	61 kN
Basic static load rating - C ₀	40.5 kN
Fatigue load limit - P _u	1.7 kN
Reference speed	9000 r/min
Limiting speed	9000 r/min
Calculation factor - k _r	0.1
Calculation factor - k _a	1.6



MianKang Bearing Co., Ltd.

Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - Y ₀	0.52
Calculation factor - Y ₁	0.55
Calculation factor - Y ₂	0.93
Calculation factor - X	0.35
Calculation factor - Y ₀	0.26
Calculation factor - Y ₁	
Calculation factor - Y ₂	0.57
Category	Angular Contact Ball Bearings
Inventory	25.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.81
EAN	7316576634161
Product Group	B00308
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3 ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Polymer
Contact Angle	40 Degree
Internal Clearance	CB
Number of Bearings	1 (Single)
Mounting Arrangement	Universal
Inch - Metric	Metric
Long Description	45MM Bore; 100MM



MianKang Bearing Co., Ltd.

	Outside Diameter; 25MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3 ISO P6; No Filling Slot; No Snap Ring
Other Features	Normal Axial Internal Clearance
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	7309 BECBP
Weight / LBS	1.79
Outside Diameter	3.937 Inch 100 Millimeter
Width	0.984 Inch 25 Millimeter
Bore	1.772 Inch 45 Millimeter
bore diameter:	45 mm
radial static load capacity:	40-1/2 kN
outside diameter:	100 mm
cage material:	Nylon
overall width:	25 mm
outer ring width:	25 mm
contact angle:	40 °
maximum rpm:	9000 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	ABEC 3 (ISO Class 6)
closure type:	Open
fillet radius:	1.5 mm



MianKang Bearing Co., Ltd.

radial dynamic load capacity:	61 kN
series:	73
d_1	66.5 mm
d_2	55.25 mm
D_1	79.9 mm
$r_{1,2}$ min.	1.5 mm
$r_{3,4}$ min.	1 mm
d_a min.	54 mm
D_a max.	91 mm
D_b max.	94.4 mm
r_a max.	1.5 mm
r_b max.	1 mm
Basic dynamic load rating C	61 kN
Basic static load rating C_0	40.5 kN
Fatigue load limit P_u	1.73 kN
Calculation factor A	0.0268
Calculation factor k_r	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor Y_0	0.26
Calculation factor Y_2	0.57
Calculation factor X	0.57
Calculation factor Y_0	0.52
Calculation factor Y_1	0.55
Calculation factor Y_2	0.93
Mass bearing	0.82 kg