




MianKang Bearing Co., Ltd.

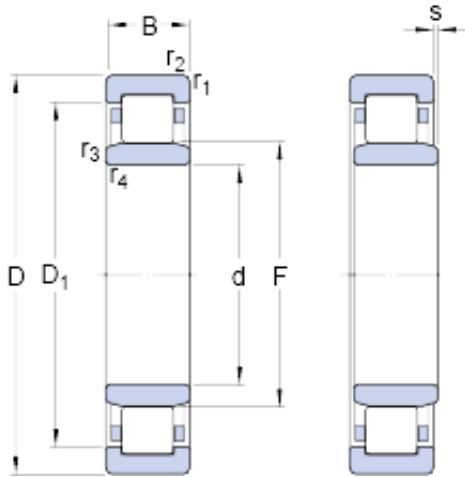

skf nu 213 ecp bearing

Bearing No. nu 213 ecp

nu 213 ecp Bearing 2D drawings and 3D CAD models

| | |
|---|-----------------------------|
| Size | 120x65x23 mm |
| Bore Diameter | 120 mm |
| Outer Diameter | 65 mm |
| Width | 23 mm |
| d | 65 mm |
| D | 120 mm |
| B | 23 mm |
| D ₁ | 103.2 mm |
| F | 78.5 mm |
| r _{1,2} - min. | 1.5 mm |
| r _{3,4} - min. | 1.5 mm |
| s | 1.4 mm |
| d _a - min. | 74 mm |
| d _a - max. | 76 mm |
| d _b - min. | 81 mm |
| D _a - max. | 110.6 mm |
| r _a - max. | 1.5 mm |
| r _b - max. | 1.5 mm |
| Basic dynamic load rating - C | 122 kN |
| Basic static load rating - C ₀ | 118 kN |
| Fatigue load limit - P _u | 15.6 kN |
| Reference speed | 6300 r/min |
| Limiting speed | 6700 r/min |
| Calculation factor - k _r | 0.15 |
| Category | Cylindrical Roller Bearings |



MianKang Bearing Co., Ltd.

| | |
|---------------------------|---|
| Inventory | 0.0 |
| Manufacturer Name | SKF |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 1.065 |
| EAN | 7316577031457 |
| Product Group | B04144 |
| Bore Profile | Straight |
| Cage Material | Polymer |
| Precision Class | RBEC 1 ISO P0 |
| Number of Rows of Rollers | Single Row |
| Separable | Inner Ring - Both Sides |
| Rolling Element | Cylindrical Roller Bearing |
| Profile | Complete with Outer and Inner Ring |
| Snap Ring | No |
| Internal Clearance | C0-Medium |
| Retainer | Yes |
| Relubricatable | Yes |
| Inch - Metric | Metric |
| Other Features | High Capacity Plain Inner Ring 2 Rib Outer Ring Cage on Outer Ring ID |
| Long Description | 65MM Bore; Straight Bore Profile; 120MM Outside Diameter; 23MM Width; Polymer Cage Material; RBEC 1 ISO P0; Single Row; Inner Ring - Both Sides Separable; No Snap Ring; Relubricatable; C0-Medium In |
| Category | Cylindrical Roller Bearing |
| UNSPSC | 31171547 |
| Harmonized Tariff Code | 8482.50.00.00 |
| Noun | Bearing |
| Manufacturer URL | http://www.skf.com |



MianKang Bearing Co., Ltd.

| | |
|------------------------------|---|
| Manufacturer Item Number | NU 213 ECP |
| Weight / LBS | 2.346 |
| Bore | 2.559 Inch 65 Millimeter |
| Width | 0.906 Inch 23 Millimeter |
| Outside Diameter | 4.724 Inch 120 Millimeter |
| bore diameter: | 65 mm |
| precision rating: | RBEC 1 (ISO Class Normal) |
| outside diameter: | 120 mm |
| maximum rpm: | 6700 RPM |
| overall width: | 23 mm |
| bearing material: | Steel |
| flanges: | (2) Outer Ring |
| cage material: | Polyamide |
| bore type: | Straight |
| finish/coating: | Uncoated |
| number of rows: | 1 |
| closure type: | Open |
| internal clearance: | C0 |
| application: | Piston Type Machines, Rolling Mills, Spindles/Machine Tools |
| ring separation: | Separable Ring |
| outer ring width: | 23 mm |
| operating temperature range: | Maximum of +300 ° F |
| fillet radius: | 1.5 mm |
| dynamic load capacity: | 122 kN |
| series: | NU2 |
| static load capacity: | 118 kN |
| D ₁ | 103.2 mm |
| r _{1,2} min. | 1.5 mm |
| r _{3,4} min. | 1.5 mm |
| | |



MianKang Bearing Co., Ltd.

| | |
|--------------------------------|----------|
| s max. | 1.4 mm |
| d_a min. | 74 mm |
| d_a max. | 76 mm |
| d_b min. | 81 mm |
| D_a max. | 110.6 mm |
| r_a max. | 1.5 mm |
| r_b max. | 1.5 mm |
| Basic dynamic load rating C | 122 kN |
| Basic static load rating C_0 | 118 kN |
| Fatigue load limit P_u | 15.6 kN |
| Calculation factor k_r | 0.15 |
| Limiting value e | 0.2 |
| Axial load factor Y | 0.6 |
| Mass bearing | 1.01 kg |