




MianKang Bearing Co., Ltd.

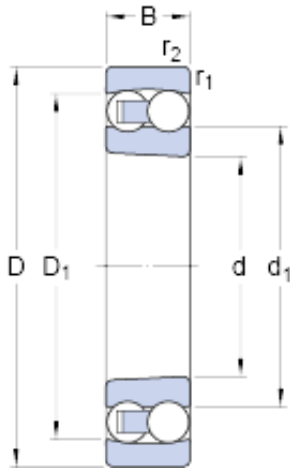

skf 1213 ektn9 bearing

Bearing No. 1213 ektn9

1213 ektn9 Bearing 2D drawings and 3D CAD models

Size	120x65x23 mm
Bore Diameter	120 mm
Outer Diameter	65 mm
Width	23 mm
d	65 mm
D	120 mm
B	23 mm
d ₁	85.1 mm
D ₁	104 mm
r _{1,2} - min.	1.5 mm
D _a - max.	111 mm
r _a - max.	1.5 mm
Basic dynamic load rating - C	35.1 kN
Basic static load rating - C ₀	14 kN
Fatigue load limit - P _u	0.72 kN
Reference speed	11000 r/min
Limiting speed	7000 r/min
Calculation factor - k _r	0.04
Calculation factor - e	0.18
Calculation factor - Y ₀	3.6
Calculation factor - Y ₁	3.5
Calculation factor - Y ₂	5.4
Category	Self Aligning Ball Bearings
Inventory	0.0



MianKang Bearing Co., Ltd.

Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	1.1
EAN	7316576625022
Product Group	B00152
Mounting Method	Tapered Adapter
Enclosure	Open
Rolling Element	Ball Bearing
Adapter Sleeve	H-213
Cage Material	Polyamide
Precision Class	ABEC 1 ISO P0
Internal Clearance	C0-Medium
Number of Rows of Balls	Double Row
Other Features	Allowable Misalignment 2.5 Deg High Capacity Design 1:12 Taper
Long Description	65MM Bore; Tapered Adapter Mount; 120MM Outside Diameter; 23MM Inner Race Width; 23MM Outer Race Width; Open; Polyamide Cage; Double Row of Balls; ABEC 1 ISO P0; C0-Medium
Inch - Metric	Metric
Category	Self Aligning Ball Bearings
UNSPSC	31171532
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Self Aligning
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	1213 EKTN9
Weight / LBS	2.425
Inner Race Width	0.906 Inch 23 Millimeter
Outside Diameter	4.724 Inch 120 Millimeter



MianKang Bearing Co., Ltd.

Bore	2.559 Inch 65 Millimeter
Outer Race Width	0.906 Inch 23 Millimeter
bore diameter:	65 mm
precision rating:	Not Rated
outside diameter:	120 mm
maximum rpm:	7000 RPM
overall width:	23 mm
cage material:	Fiberglass Reinforced Nylon
bore type:	Tapered 1:12
finish/coating:	Uncoated
closure type:	Open
maximum misalignment:	2.5 °
internal clearance:	C0
outer ring width:	23 mm
dynamic load capacity:	35.1 kN
fillet radius:	1.5 mm
static load capacity:	14 kN
series:	1200
d_1	85.1 mm
D_1	104 mm
$r_{1,2}$ min.	1.5 mm
D_a max.	111 mm
r_a max.	1.5 mm
Basic dynamic load rating C	35.1 kN
Basic static load rating C_0	14 kN
Fatigue load limit P_u	0.72 kN
Permissible angular misalignment	2.5 °
Calculation factor k_r	0.04
Calculation factor e	0.18
Calculation factor Y_0	3.6
Calculation factor Y_1	3.5
Calculation factor Y_2	5.4



MianKang Bearing Co., Ltd.

Mass bearing	1.1 kg
--------------	--------