




MianKang Bearing Co., Ltd.

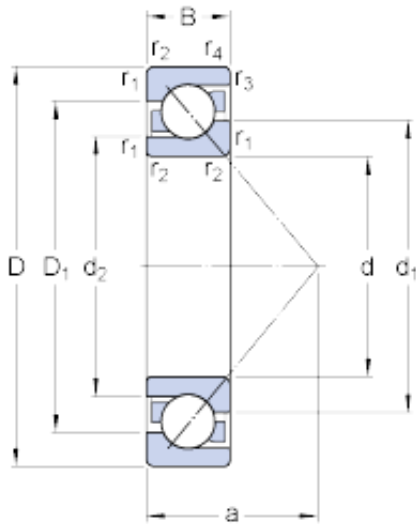

7208 bep Bearing 2D drawings and 3D CAD models

skf 7208 bep bearing

Bearing No. 7208 bep

Size	80x40x18 mm
Bore Diameter	80 mm
Outer Diameter	40 mm
Width	18 mm
d	40 mm
D	80 mm
B	18 mm
d ₁	56.25 mm
d ₂	48.08 mm
D ₁	65.55 mm
a	34 mm
r _{1,2} - min.	1.1 mm
r _{3,4} - min.	0.6 mm
d _a - min.	47 mm
D _a - max.	73 mm
D _b - max.	75.8 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
Basic dynamic load rating - C	34.5 kN
Basic static load rating - C ₀	24 kN
Fatigue load limit - P _u	1 kN
Reference speed	10000 r/min
Limiting speed	10000 r/min
Calculation factor - k _r	0.095
Calculation factor - k _a	1.4



MianKang Bearing Co., Ltd.

Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - Y ₀	0.52
Calculation factor - Y ₁	0.55
Calculation factor - Y ₂	0.93
Calculation factor - X	0.35
Calculation factor - Y ₀	0.26
Calculation factor - Y ₁	
Calculation factor - Y ₂	0.57
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.36
EAN	7316576633003
Product Group	B00308
Enclosure	Open
Flush Ground	No
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3 ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Polymer
Contact Angle	40 Degree
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Inch - Metric	Metric
Long Description	40MM Bore; 80MM Outside Diameter; 18MM



MianKang Bearing Co., Ltd.

	Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3 ISO P6; No Filling Slot; No Snap Ring
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	7208 BEP
Weight / LBS	0.785
Outside Diameter	3.15 Inch 80 Millimeter
Width	0.709 Inch 18 Millimeter
Bore	1.575 Inch 40 Millimeter
bore diameter:	40 mm
radial static load capacity:	26 kN
outside diameter:	80 mm
cage material:	Nylon
overall width:	18 mm
outer ring width:	18 mm
contact angle:	40 °
maximum rpm:	11000 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	Not Rated
closure type:	Open
fillet radius:	1 mm
radial dynamic load capacity:	37.7 kN
series:	72



MianKang Bearing Co., Ltd.

d_1	56.25 mm
d_2	48.08 mm
D_1	65.55 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
d_a min.	47 mm
D_a max.	73 mm
D_b max.	75.8 mm
r_a max.	1 mm
r_b max.	0.6 mm
Basic dynamic load rating C	34.5 kN
Basic static load rating C_0	24 kN
Fatigue load limit P_u	1.02 kN
Calculation factor A	0.0102
Calculation factor k_r	0.095
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor Y_0	0.26
Calculation factor Y_2	0.57
Calculation factor X	0.57
Calculation factor Y_0	0.52
Calculation factor Y_1	0.55
Calculation factor Y_2	0.93
Mass bearing	0.37 kg