




# MianKang Bearing Co., Ltd.

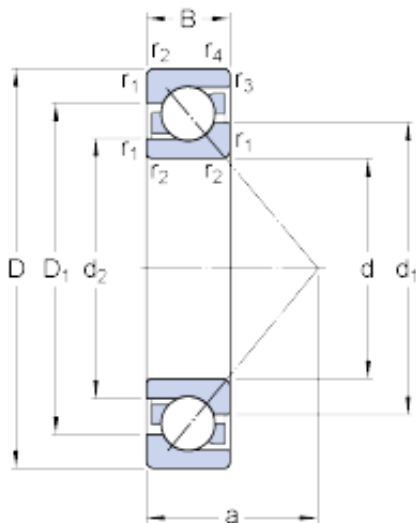

## skf 7200 becbp bearing

Bearing No. 7200 becbp

Size	30x10x9 mm
Bore Diameter	30 mm
Outer Diameter	10 mm
Width	9 mm
d	10 mm
D	30 mm
B	9 mm
d <sub>1</sub>	18.3 mm
d <sub>2</sub>	14.57 mm
D <sub>1</sub>	22.85 mm
a	13 mm
r <sub>1,2</sub> - min.	0.6 mm
r <sub>3,4</sub> - min.	0.3 mm
d <sub>a</sub> - min.	14.2 mm
D <sub>a</sub> - max.	25.8 mm
D <sub>b</sub> - max.	27.6 mm
r <sub>a</sub> - max.	0.6 mm
r <sub>b</sub> - max.	0.3 mm
Basic dynamic load rating - C	7 kN
Basic static load rating - C <sub>0</sub>	3.4 kN
Fatigue load limit - P <sub>u</sub>	0.14 kN
Reference speed	30000 r/min
Limiting speed	30000 r/min
Calculation factor - k <sub>r</sub>	0.095
Calculation factor - k <sub>a</sub>	1.4

7200 becbp Bearing 2D drawings and 3D CAD models



## MianKang Bearing Co., Ltd.

Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - Y <sub>0</sub>	0.52
Calculation factor - Y <sub>1</sub>	0.55
Calculation factor - Y <sub>2</sub>	0.93
Calculation factor - X	0.35
Calculation factor - Y <sub>0</sub>	0.26
Calculation factor - Y <sub>1</sub>	
Calculation factor - Y <sub>2</sub>	0.57
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.034
EAN	7316577127914
Product Group	B00308
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3   ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Polymer
Contact Angle	40 Degree
Internal Clearance	CB
Number of Bearings	1 (Single)
Mounting Arrangement	Universal
Inch - Metric	Metric
Long Description	10MM Bore; 30MM



## MianKang Bearing Co., Ltd.

	Outside Diameter; 9MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3   ISO P6; No Filling Slot; No Snap Ring
Other Features	Normal Axial Internal Clearance
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	7200 BECBP
Weight / LBS	0.066
Bore	0.394 Inch   10 Millimeter
Outside Diameter	1.181 Inch   30 Millimeter
Width	0.354 Inch   9 Millimeter
bore diameter:	10 mm
radial static load capacity:	3.35 kN
outside diameter:	30 mm
cage material:	Nylon
overall width:	9 mm
outer ring width:	9 mm
contact angle:	40 °
maximum rpm:	30000 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	Not Rated
closure type:	Open
fillet radius:	0.6 mm



## MianKang Bearing Co., Ltd.

radial dynamic load capacity:	7.02 kN
series:	72
$d_1$	18.3 mm
$d_2$	14.57 mm
$D_1$	22.85 mm
$r_{1,2}$ min.	0.6 mm
$r_{3,4}$ min.	0.3 mm
$d_a$ min.	14.2 mm
$D_a$ max.	25.8 mm
$D_b$ max.	27.6 mm
$r_a$ max.	0.6 mm
$r_b$ max.	0.3 mm
Basic dynamic load rating C	7.02 kN
Basic static load rating $C_0$	3.35 kN
Fatigue load limit $P_u$	0.14 kN
Calculation factor A	0.000224
Calculation factor $k_r$	0.095
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor $Y_0$	0.26
Calculation factor $Y_2$	0.57
Calculation factor X	0.57
Calculation factor $Y_0$	0.52
Calculation factor $Y_1$	0.55
Calculation factor $Y_2$	0.93
Mass bearing	0.03 kg